


T-Motor ALPHA 40A 6S

DataSheet Specification

Technical Drawing

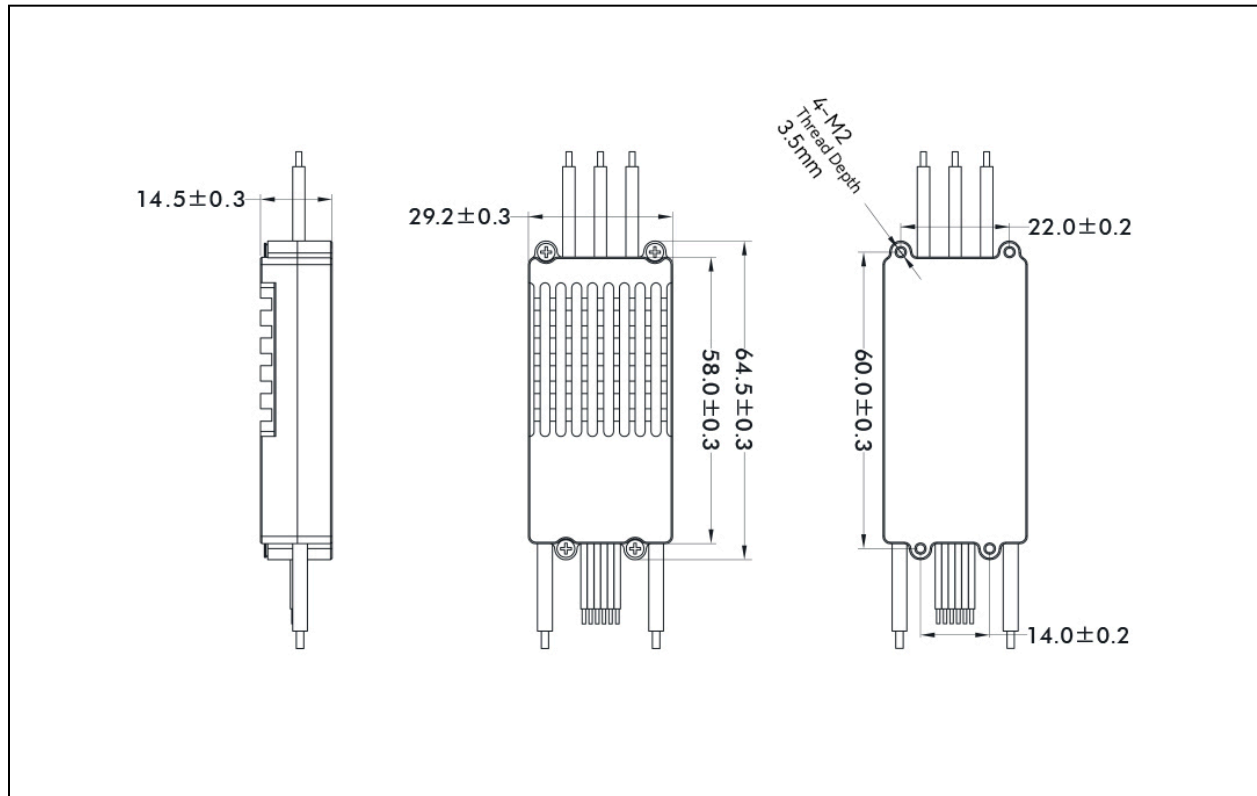

Specification

Size	64.5*29.4*14.7mm (L*W*H)	Power Cable	Silicone wire-red/black-14AWG-150MM
Weight(Incl. cables)	54.5g	Signal Cable	PVC flat cable-30 core wires--2-300MM (white, blank, black/JP 3P male connector)
Motor Cable	Silicone wire-deep orange-16AWG-65 MM*3PCS	programming Cable	PVC flat cable-30 core wires--3-300MM(black, red, white/JP 3P male connector)

Support Voltage(6S)	18-25.2V	BEC	NO
Con. Current	20A	Throttle Pos. Range	1100-1940μs
Peak Current(10s)	40A	Throttle Refresh Frequency	500Hz
Standby Consumption	≤50mA	Throttle Response Speed	120ms

Packing List

