


SPECIFICATION


Current Rating:3.0 Amp/Contact Max.
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Brass
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

Recommended P.C.B Layout

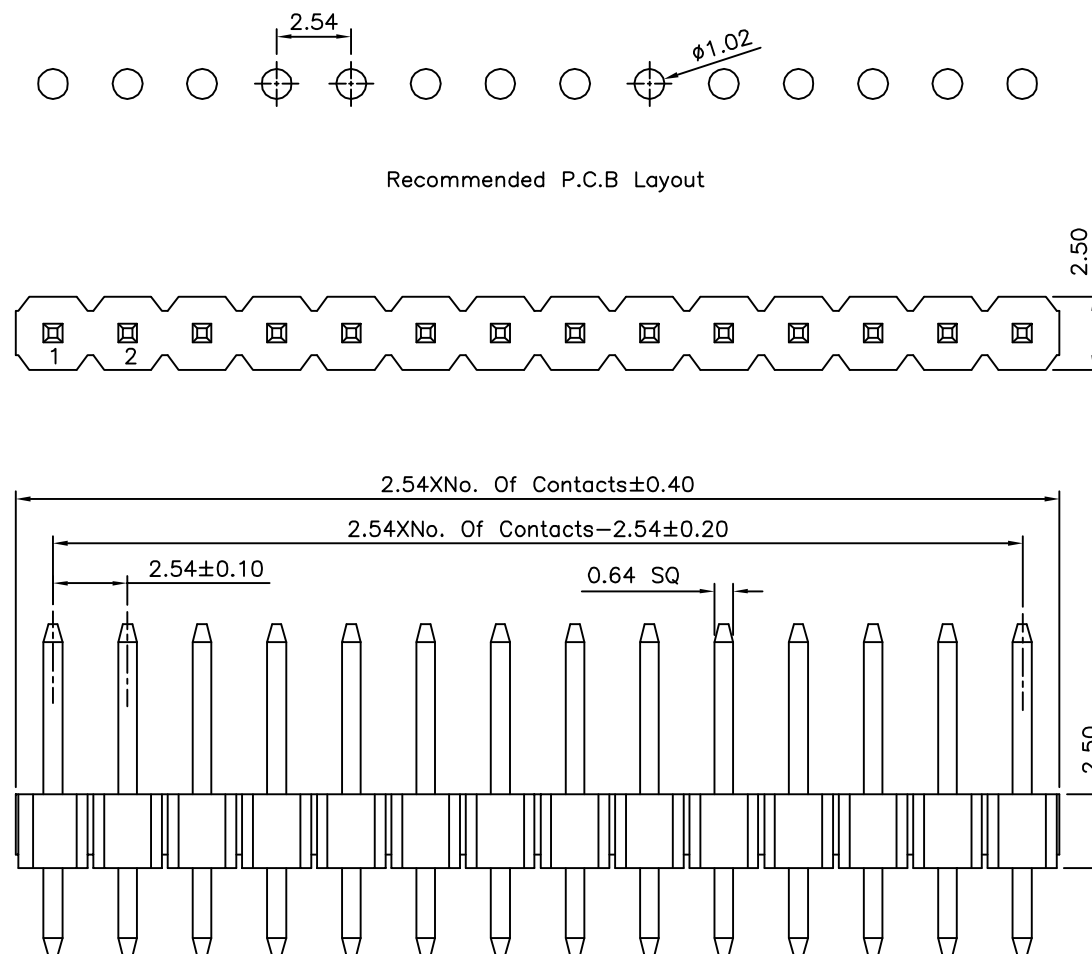

Product Code

3039 Black <https://www.sunrom.com/m/3039>
7818 Red <https://www.sunrom.com/m/7818>
7819 Green <https://www.sunrom.com/m/7819>
7820 Blue <https://www.sunrom.com/m/7820>
7821 White <https://www.sunrom.com/m/7821>
7822 Yellow <https://www.sunrom.com/m/7822>



2.54mm 40x1 Male Straight Header Strip
Height 11mm

DRAWING No.

3039

APPROVED BY

EM

CHECKED BY

ZF

DRAWING BY

AO

SCALE

NONE

REV.

AO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG. $\pm 5^\circ$

UNIT

mm



NO. REV.

REVISIONS

CH

DATE

AO

NEW RELEASE

HZ

03/24/2012