


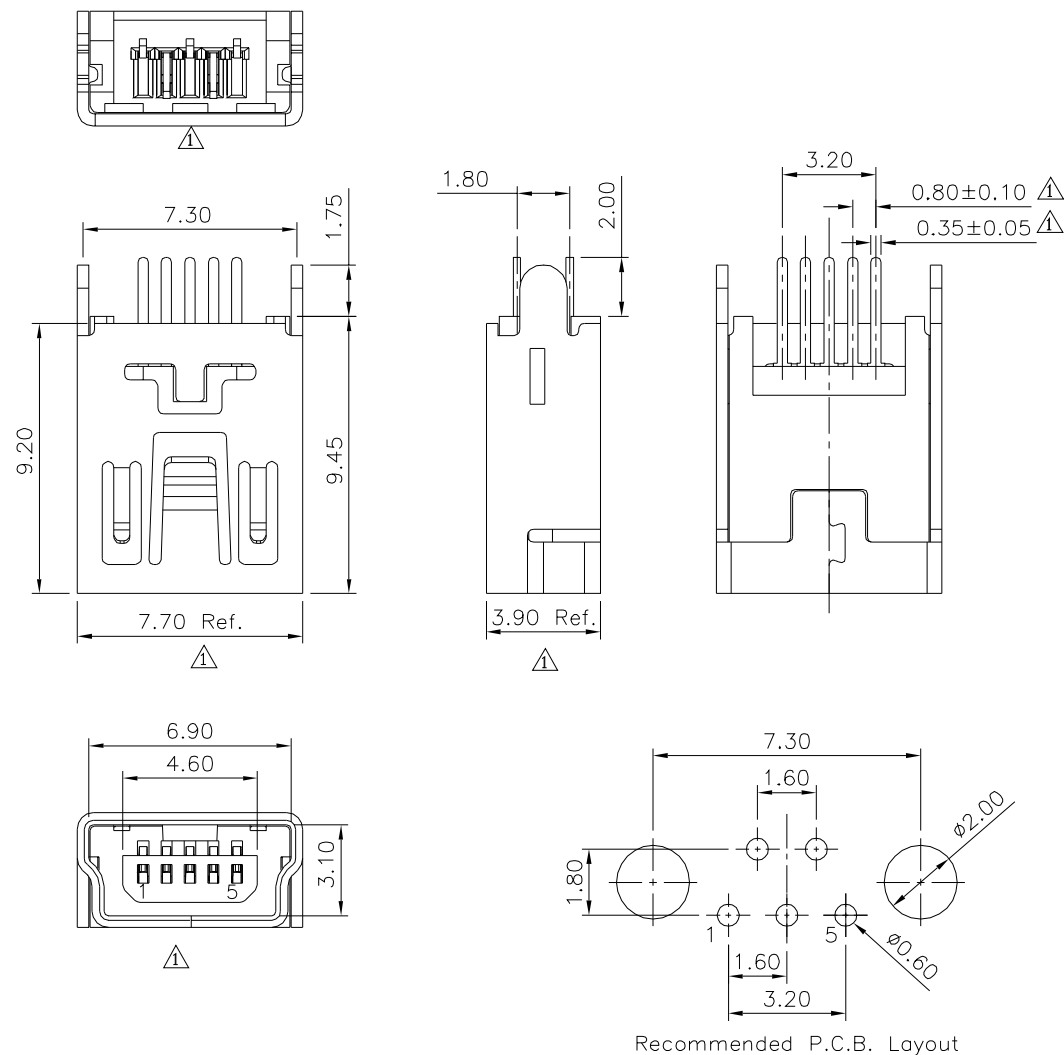

SPECIFICATION

Current Rating: 1A Max.
 Voltage: 30V Max.
 Dielectric Withstanding Voltage: 100V AC For 1 Minute
 Contact Resistance: 50 Milliohms Max.
 Insulation Resistance: 100 Megaohms Min.
 Temperature Range: -40°C ~ +85°C
 Total Mating Force: 3.57 Kgf Max.
 Total Unmating Force: 0.7 Kgf Min.
 After Durability: 5000 Cycles, 0.3 Kgf Min.

△ Contacts: Phosphor Bronze

Gold Flash On Contact Area, Tin Plated
 On Solder Tails, Over Nickel

Insulator: LCP+30%G.F.(UL94V-0), Black
 Shell: Phosphor Bronze, Nickel Plated Over All
 RoHS Compliant

Mini USB 5 Pin Vertical Straight Mounting

<https://www.sunrom.com/m/7264>

DRAWING No. △

7264

APPROVED BY

ME

CHECKED BY

HZ

DRAWING BY

CY

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38 .X* ±2.0°
 .XX ±0.25 .XX* ±1.0°
 .XXX ±0.10 .XXX* ±0.5°

SCALE

NONE

REV.

B1

UNIT

mm

NO. REV.

REVISIONS

CH

DATE

DATE