

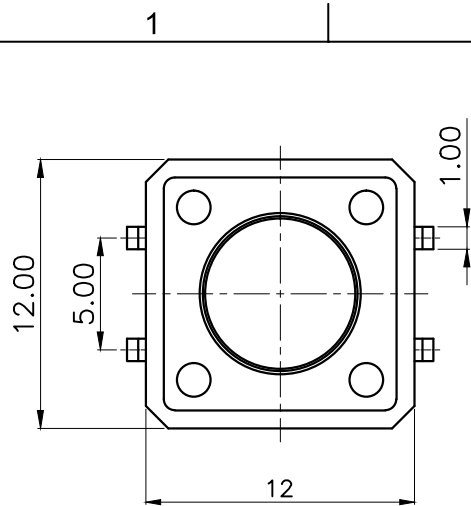



PCB Layout(Pattern side)

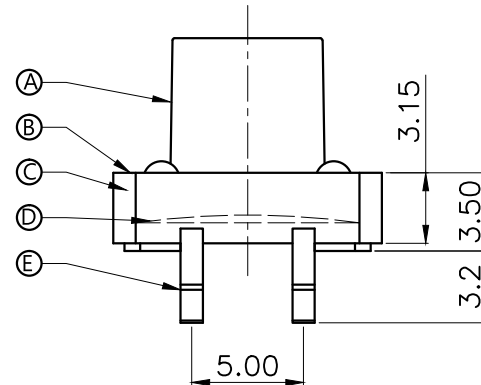

Circuit Diagram

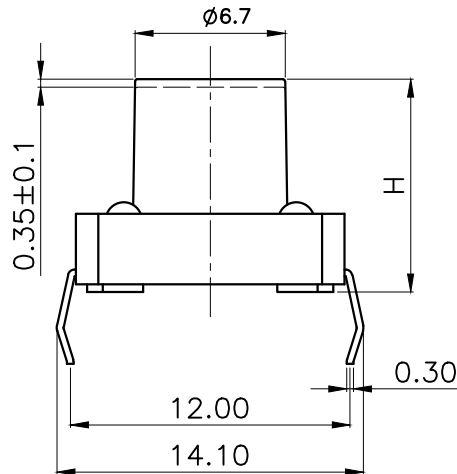

SPECIFICATION

Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min. 500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30°C~+85°C
Storage Temp:	-30°C~+80°C

⑤	Terminal		4	Brass	Silvering
④	Reed		1	Phosphorus copper	Silver covered
③	Base		1	PPA	Black
②	Cover		1	SPCC	Nickel Plating
①	Button		1	PA66	Black
NO.	Name	Number	Qty	Materil	Remarks

PRODUCT NAME

Tactile Switch 12x12 Through Hole 4P

PRODUCT URL

<https://www.sunrom.com/c/12x12mm-size>

DATE

01/04/2025

SUNROM.COM